


A系列直板滚子链

Roller chains with straight side plates (A series)

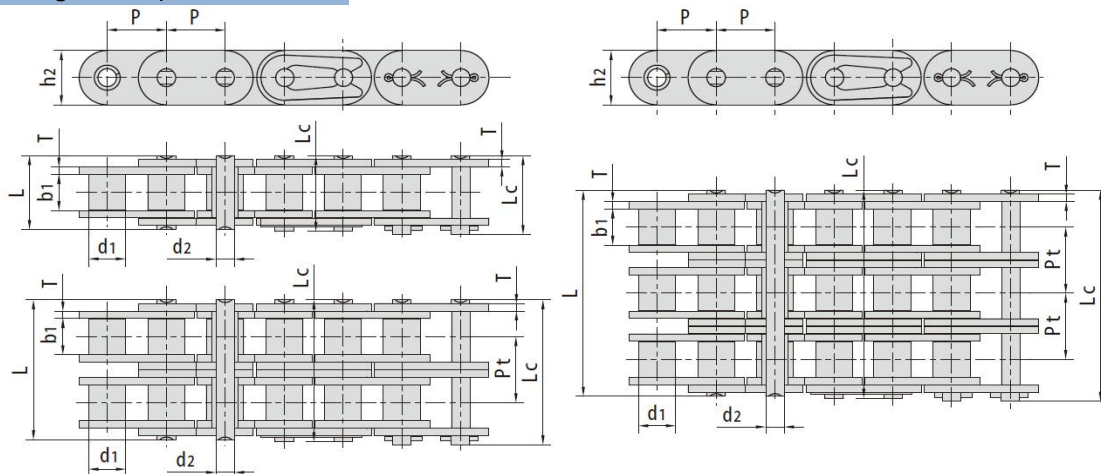

华宇链号	节距	滚子直径	内节内宽	销轴直径	链板厚度	内链板高度	销轴长度		排距	抗拉强度	每米长重	
HUAYU Chain	Pitch	Roller diameter	Width between inner plates	Pin diameter	Plate thickness	Inner plate depth	Pin length		Transverse pitch	Ultimate tensile strength	Weight per meter	
	P mm	d1 mm	b1 mm	d2 mm	T mm	h2 mm	L mm	Lc mm	Pt mm	U.T.S. (kN)	Wt. (kg/m)	
*C35-1	9.525	5.08	4.77	3.58	1.30	9.00	13.30	14.30	-	7.90	0.41	
C08A-1	C40-1	12.70	7.95	7.85	3.96	1.50	12.00	16.60	18.80	-	14.10	0.73
C10A-1	C50-1	15.875	10.16	9.40	5.08	2.03	15.09	20.70	23.30	-	22.20	1.23
C12A-1	C60-1	19.05	11.91	12.57	5.94	2.42	18.00	25.90	28.30	-	31.80	1.81
C16A-1	C80-1	25.40	15.88	15.75	7.92	3.25	24.00	32.70	36.50	-	56.70	3.09
C20A-1	C100-1	31.75	19.05	18.90	9.53	4.00	30.00	40.40	44.70	-	88.50	4.56
C24A-1	C120-1	38.10	22.23	25.22	11.10	4.80	35.70	50.30	54.30	-	127.00	6.86
C28A-1	C140-1	44.45	25.40	25.22	12.70	5.60	41.00	54.40	59.00	-	172.40	8.49
C32A-1	C160-1	50.80	28.58	31.55	14.27	6.40	47.80	64.80	69.60	-	226.80	11.50
C08A-2	C40-2	12.70	7.95	7.85	3.96	1.50	12.00	31.00	33.20	14.38	28.20	1.43
C10A-2	C50-2	15.875	10.16	9.40	5.08	2.03	15.09	38.90	41.40	18.11	44.40	2.42
C12A-2	C60-2	19.05	11.91	12.57	5.94	2.42	18.00	48.80	51.10	22.78	63.60	3.58
C16A-2	C80-2	25.40	15.88	15.75	7.92	3.25	24.00	62.70	65.8	29.29	113.40	6.12
C20A-2	C100-2	31.75	19.05	18.90	9.53	4.00	30.00	76.40	80.5	35.76	177.00	9.08
C24A-2	C120-2	38.10	22.23	25.22	11.10	4.80	35.70	95.80	99.7	45.44	254.00	13.60
C28A-2	C140-2	44.45	25.40	25.22	12.70	5.60	41.00	103.30	107.9	48.87	344.80	16.86
C32A-2	C160-2	50.80	28.58	31.55	14.27	6.40	47.80	123.30	128.1	58.55	453.60	22.90
C08A-3	C40-3	12.70	7.95	7.85	3.96	1.50	12.00	45.40	47.6	14.38	42.30	2.14
C10A-3	C50-3	15.875	10.16	9.40	5.08	2.03	15.09	57.00	59.5	18.11	66.60	3.62
C12A-3	C60-3	19.05	11.91	12.57	5.94	2.42	18.00	71.50	73.9	22.78	95.40	5.36
C16A-3	C80-3	25.40	15.88	15.75	7.92	3.25	24.00	91.70	95.1	29.29	170.10	9.10
C20A-3	C100-3	31.75	19.05	18.90	9.53	4.00	30.00	112.20	116.3	35.76	265.50	13.60
C24A-3	C120-3	38.10	22.23	25.22	11.10	4.80	35.70	141.40	145.2	45.44	381.00	20.43
C28A-3	C140-3	44.45	25.40	25.22	12.70	5.60	41.00	152.20	156.8	48.87	517.20	25.23
C32A-3	C160-3	50.80	28.58	31.55	14.27	6.40	47.80	181.80	186.6	58.55	680.40	34.19

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush