


**FV系列输送链**

Conveyor chains (FV series)

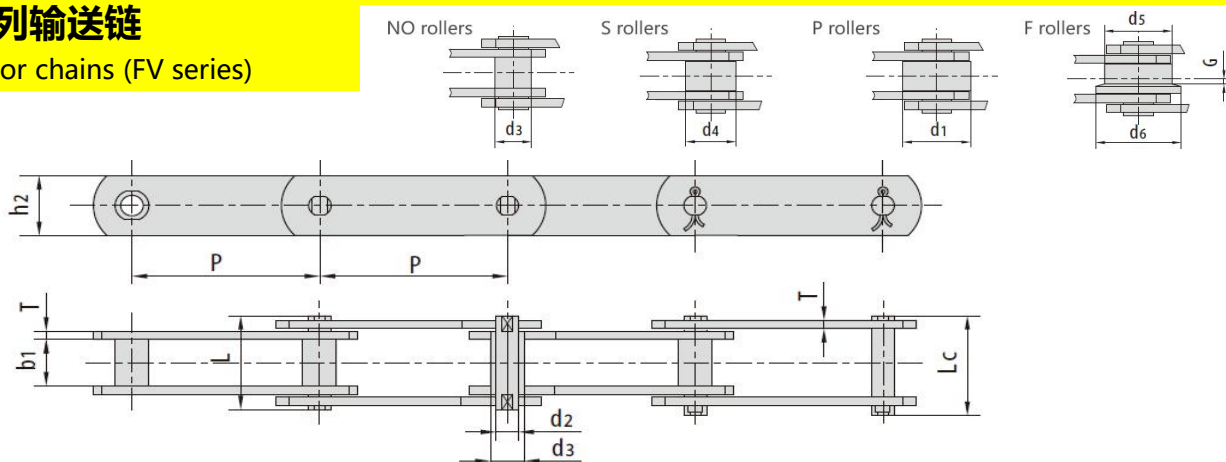

**FV系列输送链 Conveyor chains (FV series)**

DIN 链号 DIN Chain No.	节距 Pitch							滚子尺寸 Roller dimension					套筒直径 Bush diameter	
	P							d1 max	d4 max	d5 max	d6 max	G	d3 max	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
FV40	50.0	63.0	80.0	100.0	125.0	-	-	32.0	20.0	40.0	50.0	4.0	15.0	
FV63	50.0	63.0	80.0	100.0	125.0	160.0	-	40.0	26.0	50.0	63.0	5.0	18.0	
FV90	63.0	80.0	100.0	125.0	160.0	200.0	250.0	48.0	30.0	63.0	78.0	6.5	20.0	
FV112	80.0	100.0	125.0	160.0	200.0	250.0	-	55.0	32.0	72.0	90.0	7.5	22.0	
FV140	63.0	100.0	125.0	160.0	200.0	250.0	-	60.0	36.0	80.0	100.0	9.0	26.0	
FV180	100.0	125.0	160.0	200.0	250.0	315.0	-	70.0	42.0	100.0	125.0	13.0	30.0	
FV250	125.0	160.0	200.0	250.0	315.0	400.0	-	80.0	50.0	125.0	155.0	15.0	36.0	
FV315	160.0	200.0	250.0	315.0	400.0	-	-	90.0	60.0	140.0	175.0	18.0	42.0	
DIN 链号 DIN Chain No.	内节内宽 Width between inner plates		销轴直径 pin diameter		销轴长度 Pin length		链板高度 Plate depth		链板厚度 Plate thickness		抗拉强度 Tensile strength			
	b <sub>1</sub> min		d <sub>2</sub> max		L min    L <sub>c</sub>		h <sub>2</sub> max		T max		Q	*Q min		
	mm		mm		mm    mm		mm		mm		kN	kN		
FV40	18		10		36.0    39.0		25		3		40	47		
FV63	22		12		45.0    48.5		30		4		63	75		
FV90	25		14		53.0    56.5		35		5		90	115		
FV112	30		16		62.0    66.0		40		6		112	170		
FV140	35		18		67.0    71.5		45		6		140	180		
FV180	45		20		86.0    92.0		50		8		180	250		
FV250	55		26		97.0    103.5		60		8		250	300		
FV315	65		30		113.0    126.5		70		10		315	480		

\*Q 表示热处理后的抗拉强度

\*Q denotes the tensile strength after hardened