


A系列短节距精密滚子链

Short pitch precision roller chains (A series)

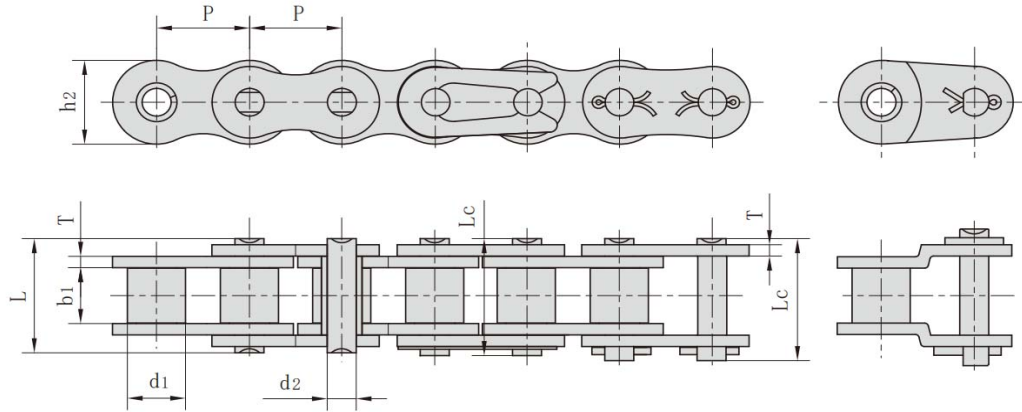

单排滚子链/套筒链 Simplex roller chains & bush chains

ANSI 链号	ISO/DIN 链号	节距	滚子直径	内节内宽	销轴直径	链板厚度	内链板高度	销轴长度		抗拉强度	每米长重
ANSI Chain	ISO/DIN Chain	Pitch	Roller diameter	Width between inner	Pin diameter	Plate thickness	Inner plate depth	Pin length		Ultimate tensile strength	Weight per meter
		P mm	d1 mm	b1 mm	d2 mm	T mm	h2 mm	L mm	Lc mm	U.T. S. (kN)	Wt. (kg/m)
*25-1	*04C	6.35	3.30	3.10	2.31	0.80	6.00	7.90	8.40	3.50	0.15
* 35-1	*06C	9.525	5.08	4.68	3.58	1.30	9.00	12.40	13.17	7.90	0.33
40-1	08A	12.70	7.92	7.85	3.96	1.50	12.00	16.60	17.80	14.10	0.62
50-1	10A	15.875	10.16	9.40	5.08	2.03	15.09	20.70	22.20	22.20	1.02
60-1	12A	19.05	11.91	12.57	5.94	2.42	18.00	25.90	27.70	31.80	1.50
80-1	16A	25.40	15.88	15.75	7.92	3.25	24.00	32.70	35.00	56.70	2.60
100-1	20A	31.75	19.05	18.90	9.53	4.00	30.00	40.40	44.70	88.50	3.91
120-1	24A	38.10	22.23	25.22	11.10	4.80	35.70	50.30	54.30	127.00	5.62
140-1	28A	44.45	25.40	25.22	12.70	5.60	41.00	54.40	59.00	172.40	7.50
160-1	32A	50.80	28.58	31.55	14.27	6.40	47.80	64.80	69.60	226.80	10.10
180-1	36A	57.15	35.71	35.48	17.46	7.20	53.60	72.80	78.60	280.20	13.45
200-1	40A	63.50	39.68	37.85	19.85	8.00	60.00	80.30	87.20	353.80	16.15
240-1	48A	76.20	47.63	47.35	23.81	9.50	72.39	95.50	103.0	510.30	23.20

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush