


A系列短节距精密滚子链

Short pitch precision roller chains (A series)

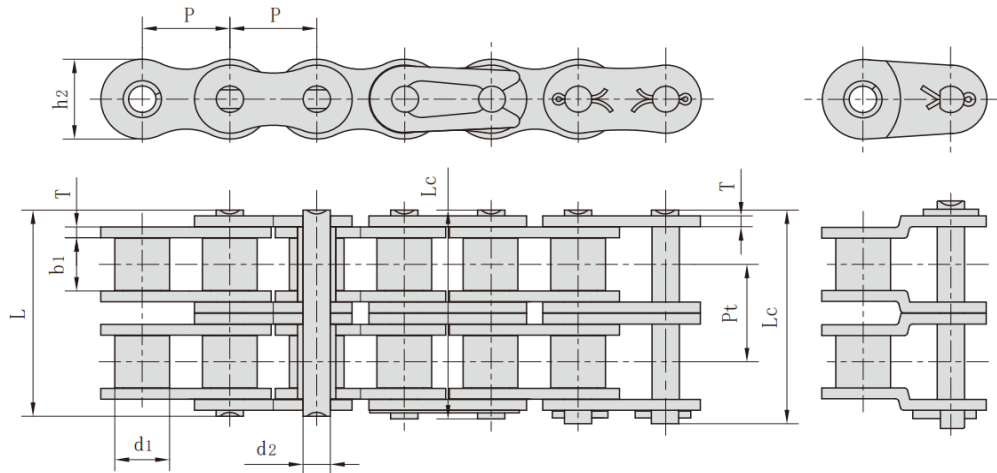

双排滚子链/套筒链 Duplex roller chains & bush chains

ANSI 链号	ISO/DIN 链号	节距	滚子直径	内节内宽	销轴直径	链板厚度	内链板高度	排距	销轴长度		抗拉强度	每米长重
									L	Lr		
ANSI Chain	ISO/DIN Chain	Pitch	Roller diameter	Width between inner plates	Pin diameter	Plate thickness	Inner plate depth	Transverse pitch	Pin length		Ultimate tensile strength	Weight per meter
		P mm	d1 mm	b1 mm	d2 mm	T mm	h2 mm	Pt mm	L mm	Lr mm	U.T. S. (kN)	Wt. (kg/m)
*25-2	*04C-2	6.35	3.30	3.10	2.31	0.80	6.00	6.40	14.50	15.00	7.00	0.28
*35-2	*06C-2	9.525	5.08	4.68	3.58	1.30	9.00	10.13	22.50	23.30	15.80	0.63
40-2	08A-2	12.70	7.92	7.85	3.96	1.50	12.00	14.38	31.00	32.20	28.20	1.12
50-2	10A-2	15.875	10.16	9.40	5.08	2.03	15.09	18.11	38.90	40.40	44.40	2.00
60-2	12A-2	19.05	11.91	12.57	5.94	2.42	18.00	22.78	48.80	50.50	63.60	2.92
80-2	16A-2	25.40	15.88	15.75	7.92	3.25	24.00	29.29	62.70	64.30	113.40	5.15
100-2	20A-2	31.75	19.05	18.90	9.53	4.00	30.00	35.76	76.40	80.50	177.00	7.80
120-2	24A-2	38.10	22.23	25.22	11.10	4.80	35.70	45.44	95.80	99.70	254.00	11.70
140-2	28A-2	44.45	25.40	25.22	12.70	5.60	41.00	48.87	103.30	107.90	344.80	15.14
160-2	32A-2	50.80	28.58	31.55	14.27	6.40	47.80	58.55	123.30	128.10	453.60	20.14
180-2	36A-2	57.15	35.71	35.48	17.46	7.20	53.60	65.84	138.60	144.40	560.50	29.22
200-2	40A-2	63.50	39.68	37.85	19.85	8.00	60.00	71.55	151.90	158.80	707.60	32.24
240-2	48A-2	76.20	47.63	47.35	23.81	9.50	72.39	87.83	183.40	190.8	1020.60	45.23

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush